



SPOT LED 140 per ZERO

Descrizione tecnica:

Apparecchio orientabile +/- 90° in alluminio nero opaco con struttura telescopica, orientabile tramite bracci meccanici snodati. Il posizionamento degli spot nel canale viene effettuato mediante l'uso di un magnete, che consente il cambio di posizione e/o l'integrazione in qualsiasi momento.

Installazione:

Per sistemi ZERO ed f_90/140



Dimensioni:

SPOT LED 140

Ø = 130 mm H = 120mm

Colore:




SPOT LED 140 15W 1835lm 127lm/W 3000°K CRI>90 350mA
SPOT LED 140 21W 2500lm 119lm/W 3000°K CRI>90 500mA

Disponibile con dimmerazione DALI.



Disponibile nella versione 2700°K e 4000°K.

SPOT LED 140

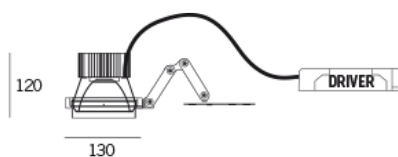



SPOT LED 140 per ZERO

Technical description:

+/- 90° adjustable fixture in matt black aluminum with telescopic structure, adjustable by mechanical jointed arms. The positioning of the spots in the channel is done through the use of a magnet, which allows the change of position and/or integration at any time.

Installation:

On ZERO or f_90/140 system.



Dimension:

SPOT LED 140

Ø = 130 mm H = 120mm

Finishes:



Black

SPOT LED 140 15W 1835lm 127lm/W 3000°K CRI>90 350mA

SPOT LED 140 21W 2500lm 119lm/W 3000°K CRI>90 500mA

Available with DALI dimmeration.



Available in 2700°K and 4000°K version.

SPOT LED 140

