



VIRGO 120 FOR ML_30 PROFILE

Technical description:

Adjustable +/- 90° lighting projector made of aluminium matt black and silky white coated with telescopic structure by articulated mechanical arms.

The positioning of the spots in the ML_30 profile can be done by the use of a bracket that allows the change of their position and/or integration every time it is desired.

Installation:

Anchored to ML_30 profile and Groove System by bracket.



Dimension:

VIRGO 120 SPOT

Ø = 120 mm H = 110 mm

Finishes:



VIRGO 120 12W 350mA 3000°K CRI>90 1530lm 127,5 lm/W



VIRGO 120 17W 500mA 3000°K CRI>90 2100lm 123,5 lm/W




Available with DALI dimmeration.



Available in 2700°K and 4000°K version.

VIRGO 120

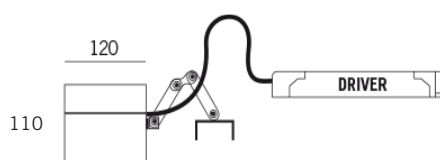

Non installabile in modalità uplight. (Fascio luminoso verso l'alto.)

Can not be mounted uplight mode. (Light beam upwards.)