

VIRGO 60 per ML_30



Descrizione tecnica:

Gruppo luce orientabile +/- 90° realizzato in alluminio verniciato nero opaco o bianco seta con struttura telescopica mediante bracci meccanici snodabili. Il posizionamento degli spot nel prolo ML_30 avviene mediante l'uso di una staffa che permette il cambio della posizione e/o l'integrazione in qualsiasi momento lo si desidera.

Installazione:

Ad incastro per profili ML_30.



Dimensioni:

VIRGO 60

Ø = 65 mm H = 85mm

Colore:



Nero opaco



Bianco seta


VIRGO 60 9W 500mA 3000°K CRI>90 1025lm 114lm/W

Disponibile con dimmerazione DALI.



Disponibile nella versione 2700°K e 4000°K.

VIRGO 60

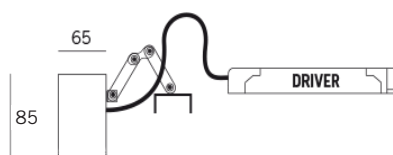

Non installabile in modalità uplight. (Fascio luminoso verso l'alto.)

Can not be mounted uplight mode. (Light beam upwards.)

VIRGO 60 per ML_30



Technical description:

+/- 90° adjustable light group made of matt black painted aluminum or silk white with telescopic structure using articulated mechanical arms positioning of the spots in the ML_30 profile takes place through the use of a bracket that allows the change of position and/or integration in any moment you want it.

Installation:

Interlocking for ML_30 profiles.



Dimension:

VIRGO 60

Ø = 65 mm H = 85mm

Finishes:



Matte black



Silk white


VIRGO 60 9W 500mA 3000°K CRI>90 1025lm 114lm/W

Available with DALI dimmeration.



Available in 2700°K and 4000°K version.

VIRGO 60

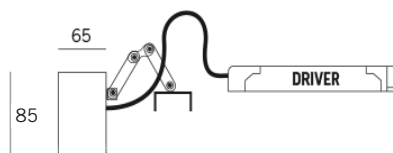

Non installabile in modalità uplight. (Fascio luminoso verso l'alto.)

Can not be mounted uplight mode. (Light beam upwards.)