



ML_50

Technical description:

Modular system in extruded aluminum painted with epoxy powders for a super matt white finish.
Suitable for recessed installation with total disappearance to create luminous cuts of indirect light. Equipped with rounded polycarbonate diffuser with 180° emission.
The system is wired with 24V LED strips, the power supply is placed remotely and the diffuser covers the entire length of the profile, creating a continuous line of light.

Installation:

Built-in, totally disappearing.

Dimension:

ML_50 P1 = 63mm H1 = 50mm H2 = 137mm

Color:


94
white ultramatte

ML_50

IP 40    24 Volt 

Configurable with project measures.

ML_50

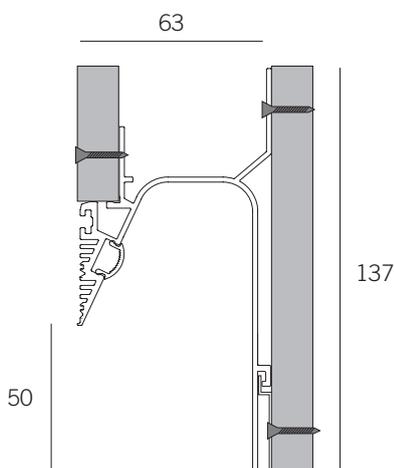

Weight 1,75 kg/m