



MINI OUT

Descrizione tecnica:

Proiettore orientabile 360°-90°, progettato per l'installazione su binario 48V della serie ME_48.

Struttura in alluminio verniciata a polveri epossilpoliestere in nitura bianco seta, nero opaco o anodizzato, bronzo, e equipaggiato con una lente asferica standard in vetro per un'emissione a 26°. L'apparecchio è dotato di un adattatore meccanico con elettronica step-down 48V-150mA e cablo con sorgente luminosa a LED COB ad alta potenza.

Installazione:

Su binario 48V della serie ME_48.



Dimensioni:

MINI OUT

Ø = 30 mm H = 78/170 mm

Colore:




MINI OUT LED 5,5W 150mA 48V 700lm CRI> 90 3000°K

Disponibile con dimmerazione DALI.



Disponibile nella versione 2700°K e 4000°K.

MINI OUT

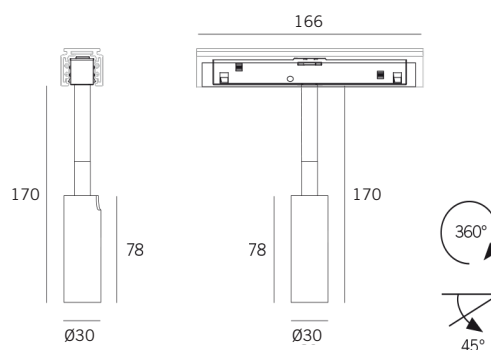

Technical data sheet

Project by Mad designers 2018

MACROLUX

MACROLUX s.r.l. 31020 San Vendemiano Treviso - Italia Via Padania, 67/69 t. +39 0438 470773 p. iva 03547130264 macrolux@macrolux.net www.macrolux.it



MINI OUT

Technical description:

360 ° -90 ° adjustable projector, designed for installation on 48V track of the ME_48 series.

Aluminum structure painted with epoxy polyester powder in white finish silk, matt black or anodized, bronze, and equipped with a standard aspherical glass lens for a 26 ° emission. The device is equipped with a mechanical adapter with 48V-150mA step-down electronics and wired with a high COB LED light source power.

Installation:

On ME_48, 48v track system.



Dimension:

MINI OUT

Ø = 30 mm H = 78/170 mm

Finishes:



Matt black



Matt white



Bronze

MINI OUT LED 5,5W 150mA 48V 700lm CRI> 90 3000°K

Available with DALI dimmeration.



Available in 2700°K and 4000°K version.

MINI OUT

