


Scheda tecnica prodotto

Progetto Mad designers 2023

MACROLUX

MACROLUX s.r.l. 31020 San Vendemiano Treviso - Italia Via Padania, 67/69 t. +39 0438 470773 p. iva 03547130264 www.macrolux.it

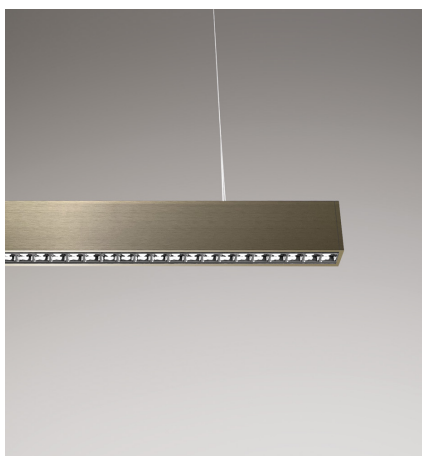

HYPERBEAM S

Descrizione tecnica:

Elemento modulare in estrusione di alluminio ad illuminazione led diretta ed indiretta di elevata qualità. Luce diretta con lente a 54°, luce indiretta con diffusore opale.

Ugr<19.

Installazione a sospensione mediante cavi in acciaio inox.

Driver integrato nel profilo.


Led up/down, testate di chiusura, kit di sospensione e di alimentazione 230V inclusi.

Installazione:

A sospensione.



UP: Diffuser - DOWN: Lens

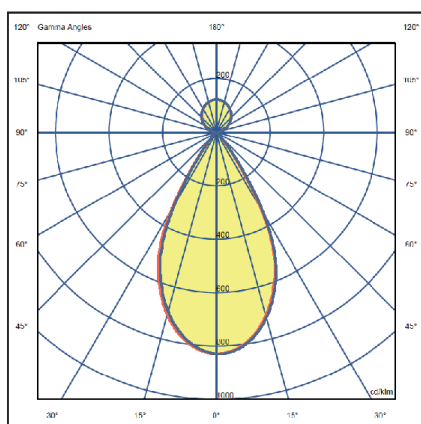


Dimensioni:

HYPERBEAM S

P= 35 mm H= 70 mm L= variabile

Colore:



HYPERBEAM L.1410 mm 3000°K 64W up 3020Lm down 5250Lm CRI>90 UGR<19


HYPERBEAM L.1680 mm 3000°K 77W up 3696Lm down 6300Lm CRI>90 UGR<19

HYPERBEAM L.2240 mm 3000°K 103W up 4928Lm down 8400Lm CRI>90 UGR<19

Disponibile a richiesta 4000°K

Disponibile con driver ON/OFF/ PUSH 1-10 v / DALI.

HYPERBEAM S

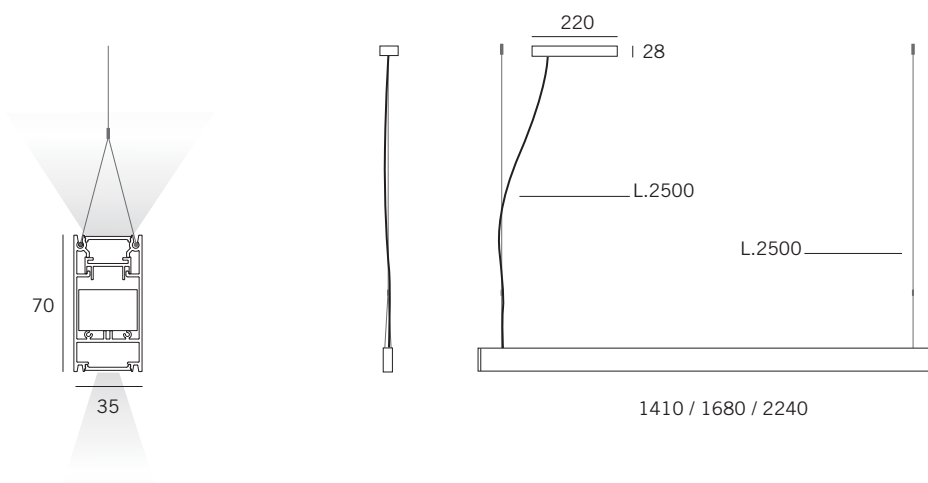


Technical product sheet

Progetto Mad designers 2023

MACROLUX

MACROLUX s.r.l. 31020 San Vendemiano Treviso - Italia Via Padania, 67/69 t. +39 0438 470773 p. iva 03547130264 www.macrolux.it

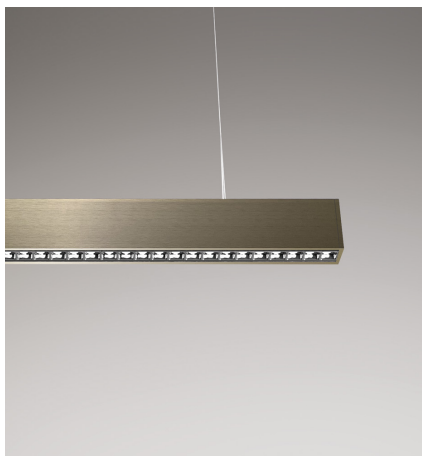

HYPERBEAM S

Technical description:

Modular aluminium extrusion element with high quality direct and indirect LED lighting. Direct light with 54° lens, indirect light with opal diffuser.

Ugr<19.

Suspension installation by means of stainless steel cables.

Driver integrated in profile.


Led up/down, end caps, suspension kit and 230V power supply included.

Installation:

Suspension



UP: Diffuser - DOWN: Lens

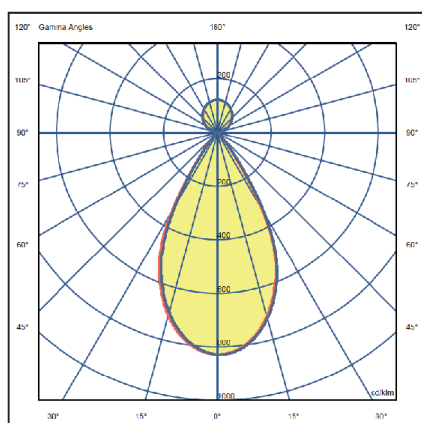


Dimensions:

HYPERBEAM S

P= 35 mm H= 70 mm L= variabile

Colours:



HYPERBEAM L.1410 mm 3000°K 64W up 3020Lm down 5250Lm CRI>90 UGR<19

HYPERBEAM L.1680 mm 3000°K 77W up 3696Lm down 6300Lm CRI>90 UGR<19

HYPERBEAM L.2240 mm 3000°K 103W up 4928Lm down 8400Lm CRI>90 UGR<19

Available on request 4000°K

Available driver ON/OFF/ PUSH 1-10 v / DALI.

HYPERBEAM S

