

Scheda tecnica prodotto

Progetto Mad designers 2020

MACROLUX

MACROLUX s.r.l. 31020 San Vendemiano Treviso - Italia Via Padania, 67/69 t. +39 0438 470773 p. iva 03547130264 macrolux@macrolux.net www.macrolux.it



SLIM SUSPENSION

Descrizione tecnica:

Lampada LED a sospensione disponibile con base incassata o con base a plafone completo di adattatore remoto; oppure con adattatore meccanico con elettronica step-down 48v-250mA. Struttura in alluminio verniciato a polveri epossilpoliestere in nitura bianco seta, nero opaco e bronzo.

L'apparecchio è dotato di lente asferica standard in vetro per un'emissione a 26°.

Installazione:

A sospensione con base incassata, con base a plafone



A sospensione su binario 48v della serie ME_48



Dimensioni:

SLIM SUSPENSION

Ø = 30 mm H = 750 mm

Colore:



Nero



Bianco



Bronzo

SLIM SUSPENSION LED 5,5W, 700lm, CRI>90, 3000°K

SLIM SUSPENSION 48V LED 5,5W, 700lm, CRI>90, 3000°K





Disponibile con dimmerazione DALI.



Disponibile nella versione 2700°K e 4000°K.

SLIM SUSPENSION

Alimentatore remoto 150mA
150mA remote power supply

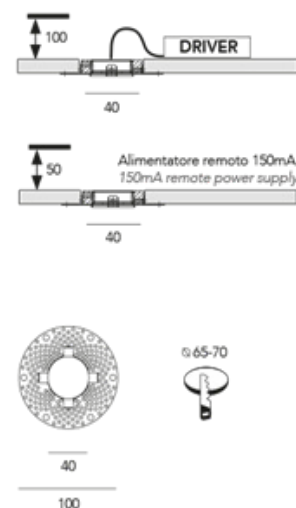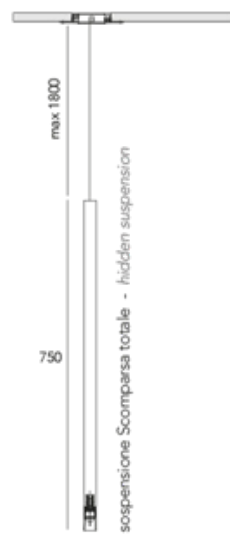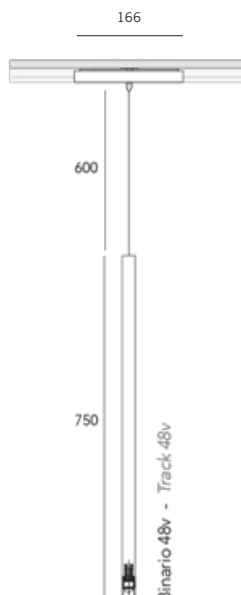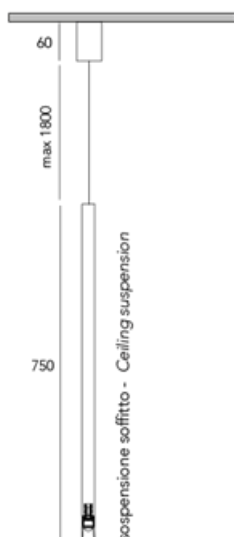

Technical data sheet

Project by Mad designers 2020

MACROLUX

MACROLUX s.r.l. 31020 San Vendemiano Treviso - Italia Via Padania, 67/69 t. +39 0438 470773 p. iva 03547130264 macrolux@macrolux.net www.macrolux.it



SLIM SUSPENSION

Technical description:

LED pendant lamp available with built-in base or with ceiling base complete with remote adapter; or with mechanical adapter with electronics

48v-250mA step-down. Aluminum structure painted with epoxy-polyester powders in silk white, matt black and bronze finish.

The device is equipped with a standard aspherical glass lens for a 26 ° emission.

Installation:

Suspended with recessed base, ceiling base.



Suspended on ME_48 series, 48v track.



Dimension:

SLIM SUSPENSION

Ø = 30 mm H = 750 mm

Finishes:



SLIM SUSPENSION LED 5,5W, 700lm, CRI>90, 3000°K

SLIM SUSPENSION 48V LED 5,5W, 700lm, CRI>90, 3000°K

Available with DALI dimmeration.



Available in 2700°K and 4000°K version.

SLIM SUSPENSION

Alimentatore remoto 150mA
150mA remote power supply

