

Scheda tecnica prodotto

Progetto Mad designers 2017

MACROLUX

MACROLUX s.r.l. 31020 San Vendemiano Treviso - Italia Via Padania, 67/69 t. +39 0438 470773 p. iva 03547130264 sales@macrolux.net www.macrolux.it



TORCH T4

Descrizione tecnica:

Lampada LED a sospensione disponibile con base incassata e innesto rapido, con base a plafone o con adattatore magnetico/meccanico con elettronica step-down 48v-250mA. Alimentatore posto remoto. Driver passante nel foro del plaster kit solo in versione on/off.

Struttura in alluminio verniciato a polveri epossilpoliestere in nitura bianco seta o nero opaco. L'apparecchio è dotato di un anello interno realizzato in alluminio anodizzato nero o bronzo, e di una lente asferica standard in vetro per un'emissione a 26°. Cablato con sorgente luminosa a LED COB ad alta potenza, 250mA.

Installazione:

TORCH T4 TRACK

Su binario 48v della serie ME_48.



TORCH T4 CON BASE /CEILING

A sospensione con base incassata o a plafone.







Dimensioni:

TORCH T4

Ø = 38 mm H = 850 mm

Colore:




TORCH T4 LED 8,6W 250mA 1100 Lm CRI> 90

Disponibile con dimmerazione DALI.




Disponibile nella versione 2700°K e 4000°K.



TORCH T4 INCASSO/RECESSED

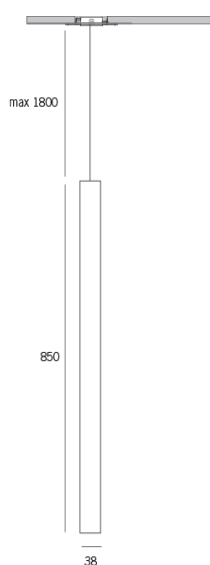

TORCH T4 PLAFONE/CEILING

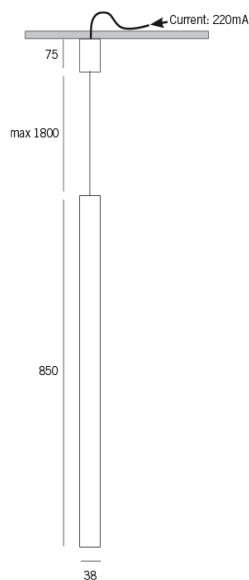

TORCH T4 TRACK 48v

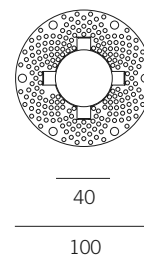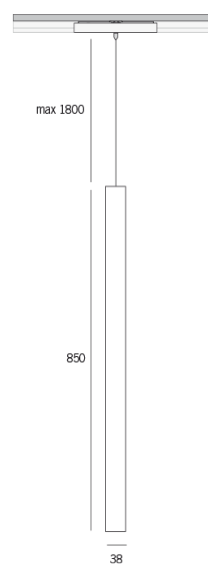

Technical data sheet

Project by Mad designers 2017

MACROLUX

MACROLUX s.r.l. 31020 San Vendemiano Treviso - Italia Via Padania, 67/69 t. +39 0438 470773 p. iva 03547130264 sales@macrolux.net www.macrolux.it



TORCH T4

Technical description:

LED pendant lamp available with recessed base and quick coupling, with ceiling-mounted base or with magnetic / mechanical adapter with electronics 48v-250mA step-down. Remote position power supply. Through-hole driver in the plaster kit on/off version only.

Aluminum structure painted with epoxy polyester powders in silk white or matt black finish. The device is equipped with an internal ring made of black or bronze anodized aluminum, and a standard aspherical glass lens for a 26 ° emission. Wired with high power COB LED light source, 250mA.

Installation:

TORCH T4 TRACK

On 48v track, ME_48 series.



TORCH T4 CEILING BASE

Suspension with recessed or ceiling-mounted base.




Dimension:

TORCH T4

Ø = 38 mm H = 850 mm

Finishes:




TORCH T4 LED 8,6W 250mA 1100 Lm CRI> 90

Available with DALI dimmeration.




Available in 2700°K and 4000°K version.

TORCH T4 INCASSO/RECESSED

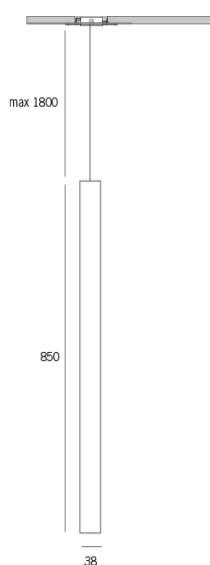

TORCH T4 PLAFONE/CEILING

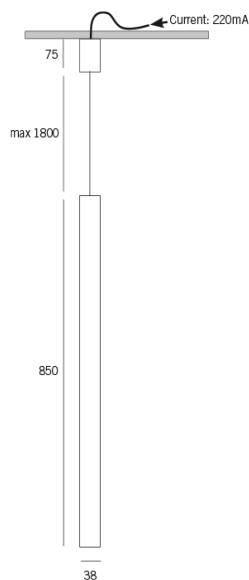

TORCH T4 TRACK 48v

